

MIRRORSTONE
LIGHTING

Easilight CCT Rotary Remote

MS-EZI-K5



CONTENTS

1. Product Feature	3
2. Product Parameter	3
3. Size	3
4. Function	4
5. Setting CCT	5
6. Factory setting: Scene Mode	5
7. Link/Unlink	6
8. Installation	7
9. Attention	7

PRODUCT FEATURE

- Brightness and color temperature dimmable
- 2.4G wireless transmission technology
- Support Miboxer/Milight 2.4G series
- Control Distance 30m
- 4 scenes storage and control
- Save 4 scenes (Max 4 scenes)
- Support to work with multi devices




PRODUCT PARAMETER


Product Name:	Easilight CCT Rotary Remote
Model No.:	K5
Working voltage:	3V(AAA*2PCS)
Standby consumption:	20μA
Transmission:	6dBm
Protocol:	2.4GHz RF
Modulation:	GFSK
Control Distance:	30M

Working temperature:	-10~40°C
EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Security Standard(LVD):	EN 61347-2-11: 2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Radio equipment(RED):	ETSI EN 300 400 V2.2.1
Certification:	CE, EMC, LVD, RED

SIZE

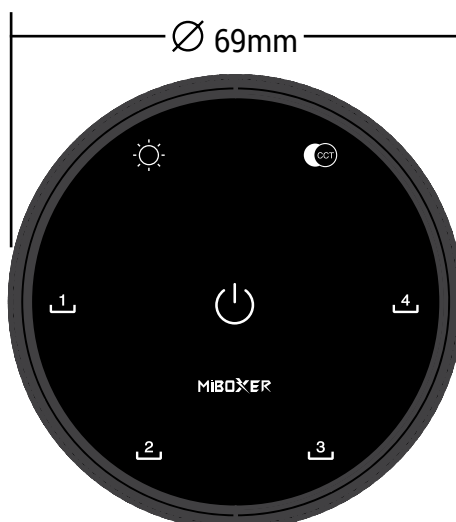

FUNCTION

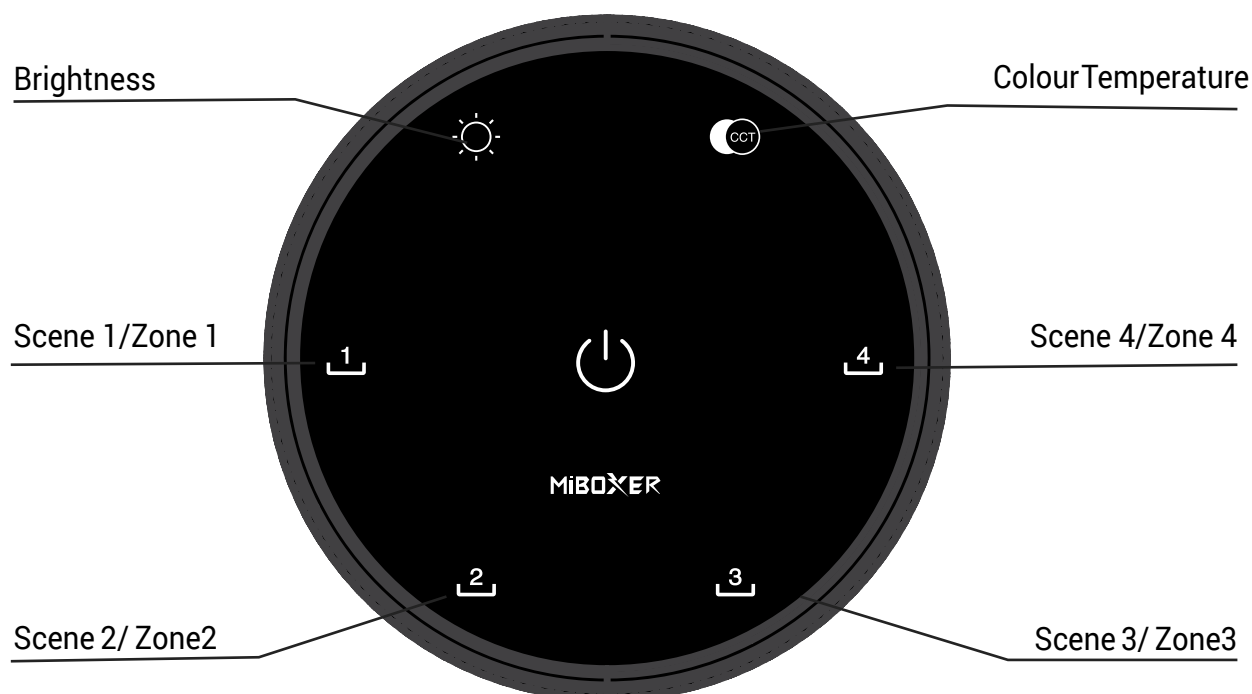

Short press it and rotating the remote to dim brightness, range from 1% to 100%



Short press it and rotating the remote to adjust colour temperature, the range from 2700K to 6500K



Turn ON all



Turn OFF all



SETTING CCT



Press  +  button 3 seconds simultaneously to enter into mini CCT setting , with a minimum adjustable value of 1800K.



Press  +  button 3 seconds simultaneously to enter into Max CCT setting , with a minimum adjustable value of 10000K.



Reminding Lo- if it's low battery

FACTORY SETTING: SCENE MODE

Switching Mode:



4 scenes mode : Press   it will display SCE while completed button 3 seconds simultaneously to restart boot animation, it will display SCE while completed



4 Zone ON/OFF mode: Press   button 3 seconds simultaneously to restart boot animation, it will display ZON while completed




Scenes Mode  ... 

Short press: Activate scene

Long press 3 seconds: Save the current lighting state/

(the light flashes one time slowly once completed successfully).


4 Zone Mode

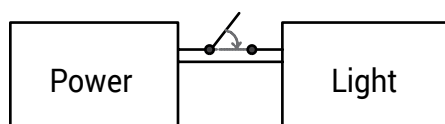


Power off the light or controller for 10 seconds and short press any button from 1-4 six times within three seconds to set up the light in zones

LINK/UNLINK


Link Controller must link with remote before using it

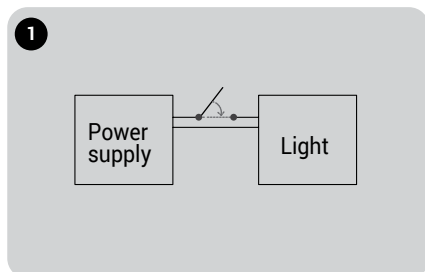

Turn off light 10 seconds and turn on again

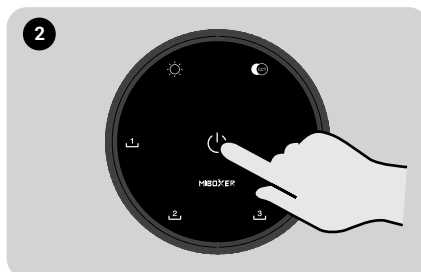

Short press “” 6 times within 3 seconds

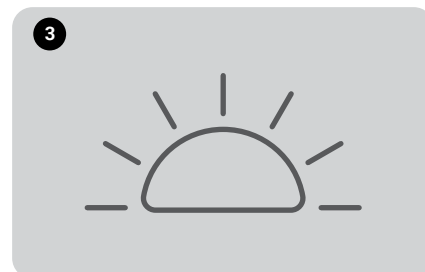


Link is done once light flashes 3 times slowly




Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)


Unlink

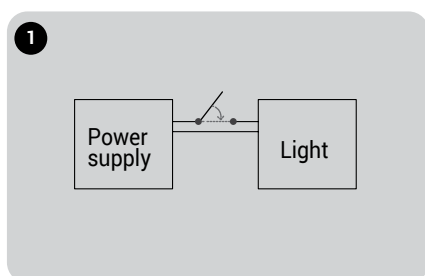

Turn off light 10 seconds and turn on again

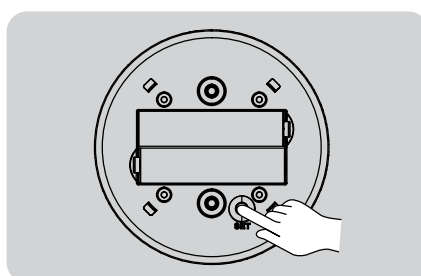

Short press “SET” 5 times within 3 seconds

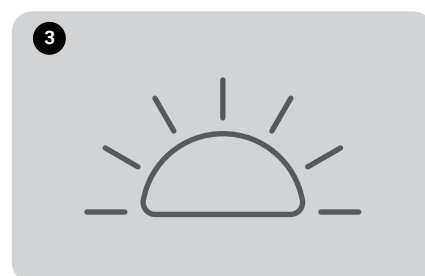


Link is done once light flashes 10 times quickly




Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)


INSTALLATION

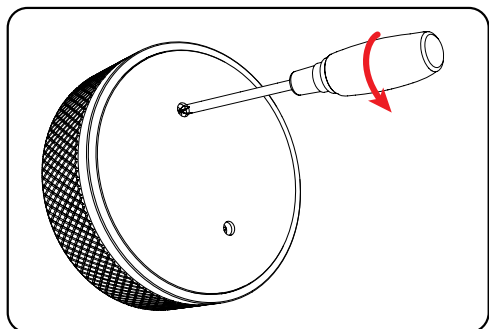

1. Loosen the screws and open the battery cover.

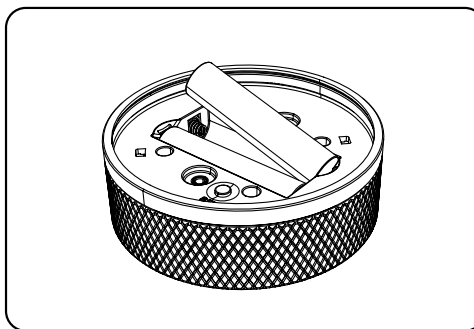

2. Put 3V(AAA*2) battery into it

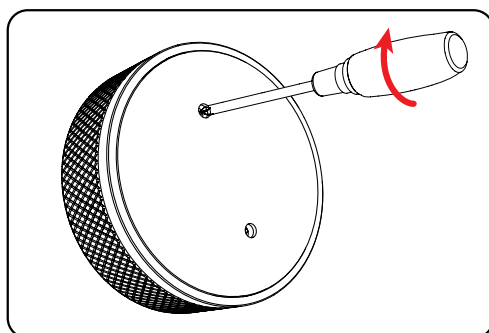

3. Cover it with the battery cover and tighten the screws.

ATTENTION:

1. To control MiBoxer/Mi-Light 2.4G series products, Please refer to the product manual for compatibility.
2. Don't use it in humidity or high temperature area, please take out battery if don't use it frequently and keep it in dry or static electricity area
3. Don't use it near metal or strong magnetic area, it will affect signal and lost distance.

MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121