

MIRRORSTONE
LIGHTING

Easilight RGB+CCT Rotary Remote

MS-EZI-K6



CONTENTS

1. Product Feature	3
2. Product Parameter	3
3. Size	3
4. Function	4
5. Setting CCT	5
6. Link/Unlink	6
7. Installation	7
8. Attention	7

PRODUCT FEATURE

- Brightness and color temperature adjustable
- 2.4GHz wireless transmission technology
- Support MiBoxer/Mi-Light 2.4G series
- Control distance: 30m
- Supports saving 4 scene/ 4 Zone presets (up to 4 presets can be saved)
- Supports matching multiple devices and can control multiple devices at the same time




PRODUCT PARAMETER


Product Name:	RGB+CCT Knob Remote
Model No.:	K6
Working voltage:	3V(AAA*2PCS)
Standby consumption:	20μA
Transmission:	6dBm
Protocol:	2.4GHz RF
Modulation:	GFSK
Control Distance:	30M

Working temperature:	-10~40°C
EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Security Standard(LVD):	EN 61347-2-11: 2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Radio equipment(RED):	ETSI EN 300 400 V2.2.1
Certification:	CE, EMC, LVD, RED

SIZE

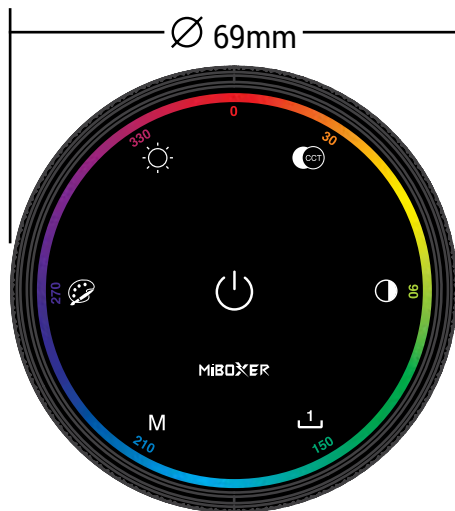

FUNCTION

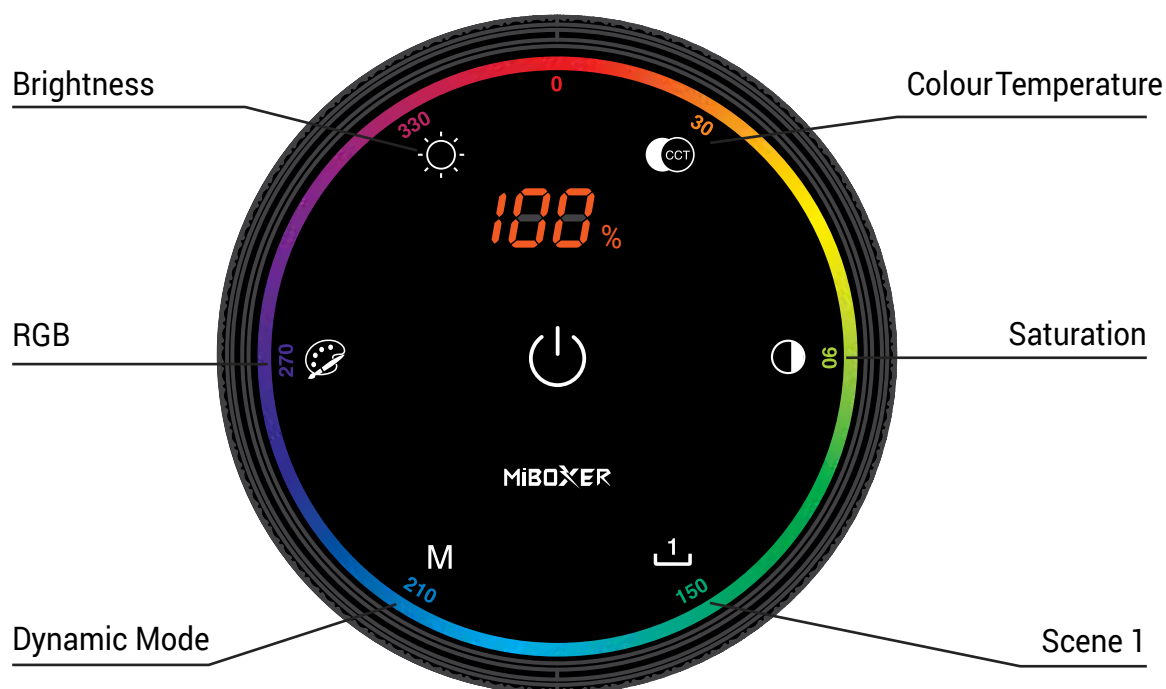

Short press it and rotating the remote to dim brightness, range from 1% to 100%



Short press it and rotating the remote to adjust colour temperature, the range from 2700K to 6500K



Short press it and rotating the remote to change saturation, range from 0.00-1.00



Short press it and rotating the remote to change RGB, range from 0-359 (LED screen display the figure)

SETTING CCT



Press  +  button 3 seconds simultaneously to enter into mini CCT setting , with a minimum adjustable value of 1800K.



Press  +  button 3 seconds simultaneously to enter into Max CCT setting , with a minimum adjustable value of 10000K.



Reminding Lo- if it's low battery



Total 9 Dynamic Modes

Short press one time to select dynamic mode, short press continuously to switch next dynamic mode




Scenes Mode

Short press: Activate scene


Long press 3 seconds: Save the current lighting state/
(the light flashes one time slowly once completed successfully).

LINK/UNLINK


Link Controller must link with remote before using it

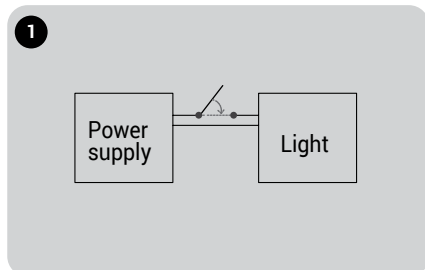

Turn off light 10 seconds and turn on again

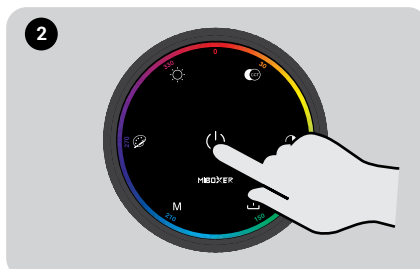

Short press “” 6 times within 3 seconds

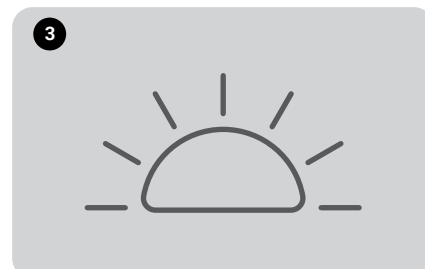


Link is done once light flashes 3 times slowly




Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)


Unlink

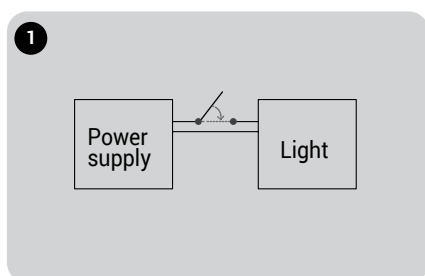

Turn off light 10 seconds and turn on again

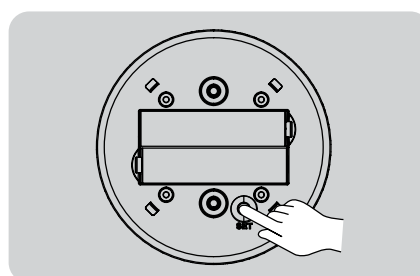

Short press “SET” 5 times within 3 seconds

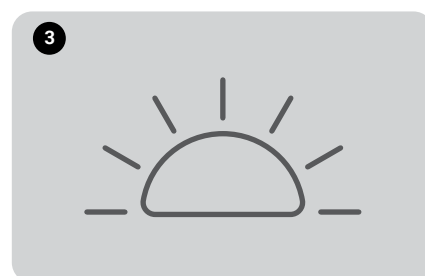


Link is done once light flashes 10 times quickly




Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)


INSTALLATION

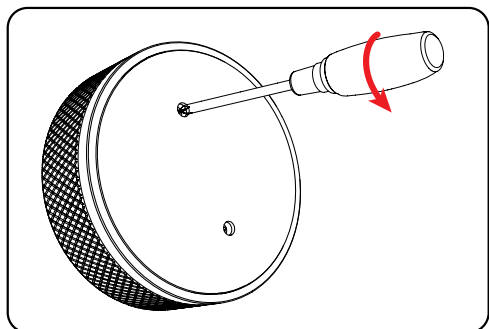

1. Loosen the screws and open the battery cover.

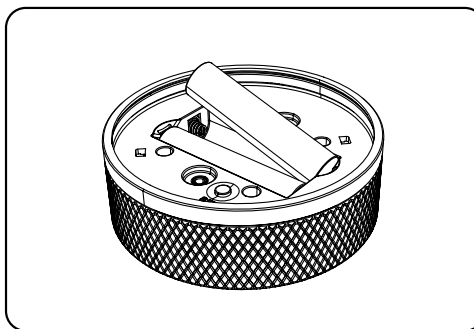

2. Put 3V(AAA*2) battery into it

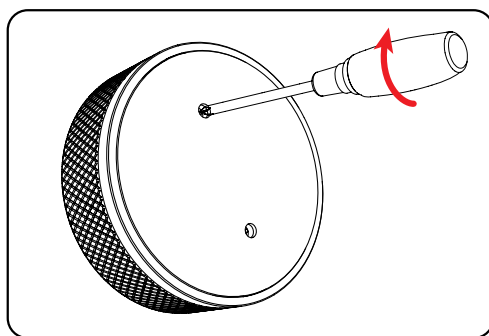

3. Cover it with the battery cover and tighten the screws.

ATTENTION:

1. To control MiBoxer/Mi-Light 2.4G series products, Please refer to the product manual for
2. compatibility.
3. Don't use it in humidity or high temperature area, please take out battery if don't use it frequently and keep it in dry or static electricity area
4. Don't use it near metal or strong magnetic area, it will affect signal and lost distance.

MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121