

MIRRORSTONE
LIGHTING

RGB+CCT Bulb
(Zigbee 3.0 + 2.4G)

CONTENTS

1. Product Feature	3
2. 2.4G RF Remote Control Instruction	4
3. Compatible With These 2.4G RF Remote Controls (Purchased Separately)	5
4. Dynamic Mode Table Selection (Only For Remote Control)	6
5. Auto Transmitting & Synchronization (Only For Remote Control)	7
6. Smartphone App Control Instruction	8
7. Philips Hue Control Instruction	9
8. Alexa Voice Control Instruction	10
9. Google Home Voice Control Instruction	11
10. DMX512 LED Transmitter Control (Purchased separately)	12
11. Attention	13

PRODUCT FEATURE


Made by new Zigbee 3.0 wireless transmitting technology with low power consumption, strong ability to build network automatically and anti-interference. with MiBoxer Zigbee gateway to get wireless dimming color, remote control, timing control, group control, music rhythm function. Support 2.4G RF remote control.



16 Millions of colors to choose



Color temperature adjustable



Dim brightness / Saturation



Follow Zigbee 3.0 standard protocol



Support Zigbee 3.0 remote control
(Zigbee 3.0 gateway is needed)



Support 2.4G Remote control



Auto-transmitting & Synchronization



Support Smartphone app control
(Zigbee 3.0 gateway is needed)






Support third party voice control
(Zigbee 3.0 gateway is needed)



DMX512 controllable
(Only for RGB+CCT output mode
DMX512 LED transmitter is needed)

Various Control Solution:

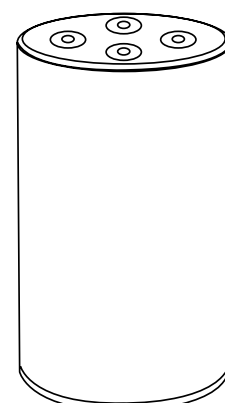


Powered By



2.4G RF REMOTE CONTROL INSTRUCTION

Linking Code Instructions

1



Power off and power on again after 10 seconds.

2



Short press "I" button 3 times within 3 seconds.

3




Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

UnLinking Code Instructions

1




Power off and power on again after 10 seconds.

2



Short press "I" button 5 times within 3 seconds.

3




Lights blink 10 times quickly means unlinking is done successfully.




Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)



COMPATIBLE WITH THESE 2.4G RF REMOTE CONTROLS (PURCHASED SEPARATELY)

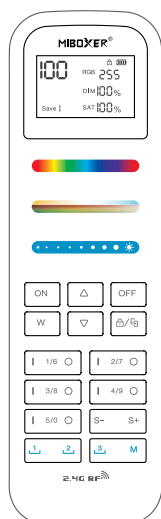



FUT100

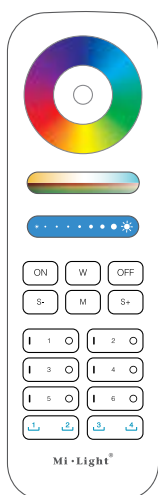


FUT089S

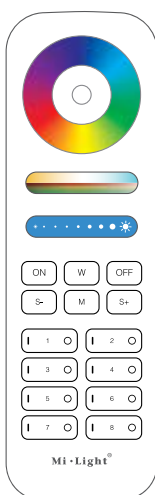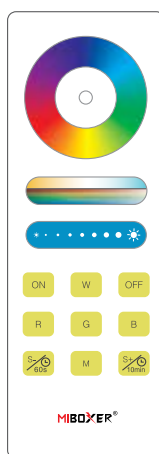FUT089
FUT089-B


FUT088

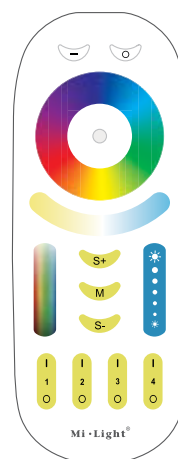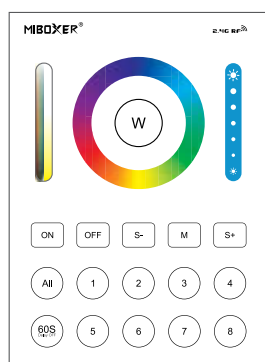FUT092
FUT092-BFUT096
FUT096


B8



B0 / B0-B




B3 / B3-B / T3



B4 / B4-B / T4



S2-B / S2-W/ S2-G

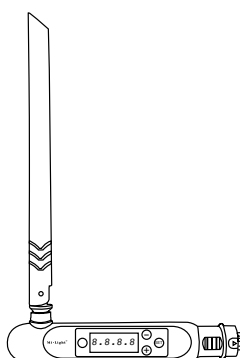

FUTD01

DYNAMIC MODE TABLE SELECTION (ONLY FOR REMOTE CONTROL)

Select Dynamic Mode Table 1:

While the light is in static mode, short press " S+ " button 5 times quickly until blue light flashes 3 times slowly, static mode is activated successfully.

Select Dynamic Mode Table 2:

While the light is in static mode, short press " S- " button 5 times quickly until yellow light flashes 3 times slowly, static mode is activated successfully.

Dynamic Mode Table 1 (Default)

Number	Dynamic Mode	Brightness/ Saturation/ Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Dynamic Mode Table 2 (Need To Switch Manually)

Number	Dynamic Mode	Brightness/ Saturation/ Speed
1	Seven colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	


AUTO TRANSMITTING & SYNCHRONIZATION (ONLY FOR REMOTE CONTROL)

Remote Signal Auto Transmittng

One light can transmit the signals from the remote control to another light within 30m, as long as there is a light within 30m, the remote control distance can be limitless.

Dynamic Modes Auto Synchronization

Multi lights can synchronize if they are in same dynamic mode and linked with same remote (distance between each light is within 30m)

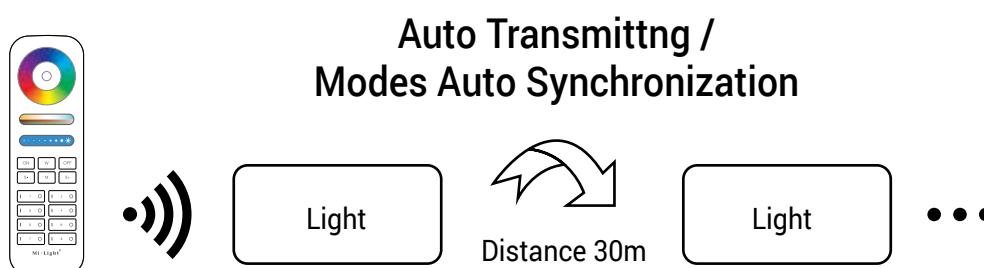

“DO NOT DISTURB” MODE IS ACTIVATED AND SHUT DOWN (DEFAULT ACTIVATED)

2.4G RF Remote Turn On and Turn Off Instruction

Turn On “Do Not Disturb” Mode:

Press “OFF” button three times within three seconds and press “ON” button three times, Activated successfully once led light flashes four times quickly.

Attention: Do Not Disturb Mode Is Activated

1. When the light is OFF status (For example: Use app or remote to turn off light) The light is OFF status once you turn off power and turn on again. (User must turn off and turn on power twice times to activate light or use APP / remote to activate light)
2. When the light is ON status. The light is ON status once you turn off and turn on power one time.\

Turn Off “Do Not Disturb” Mode:

Press “ON” button three times within three seconds and press “OFF” button three times, closed successfully once led light flashes four times slowly.


Attention: The light will be always “ON” status if you turn on and turn off power once user closed “Do Not Disturb” mode.

App turn on and off “Do Not Disturb” mode instruction (check details in page 8)

SMARTPHONE APP CONTROL INSTRUCTION


Added Zigbee 3.0 gateway into “Tuya Smart” App (please review instruction of Zigbee 3.0 gateway)

1. Connect with power supply.
2. Pairing network (attention: factory default is pairing network).
Way one: Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.
Way two: Long press “ SET ” key until indicator light flashing.
3. Open “Tuya Smart” APP to click Zigbee gateway, then click “Add sub device”.
4. Click “Indicator is flashing quickly”.
5. Support APP dimming or group control and etc once added successfully.

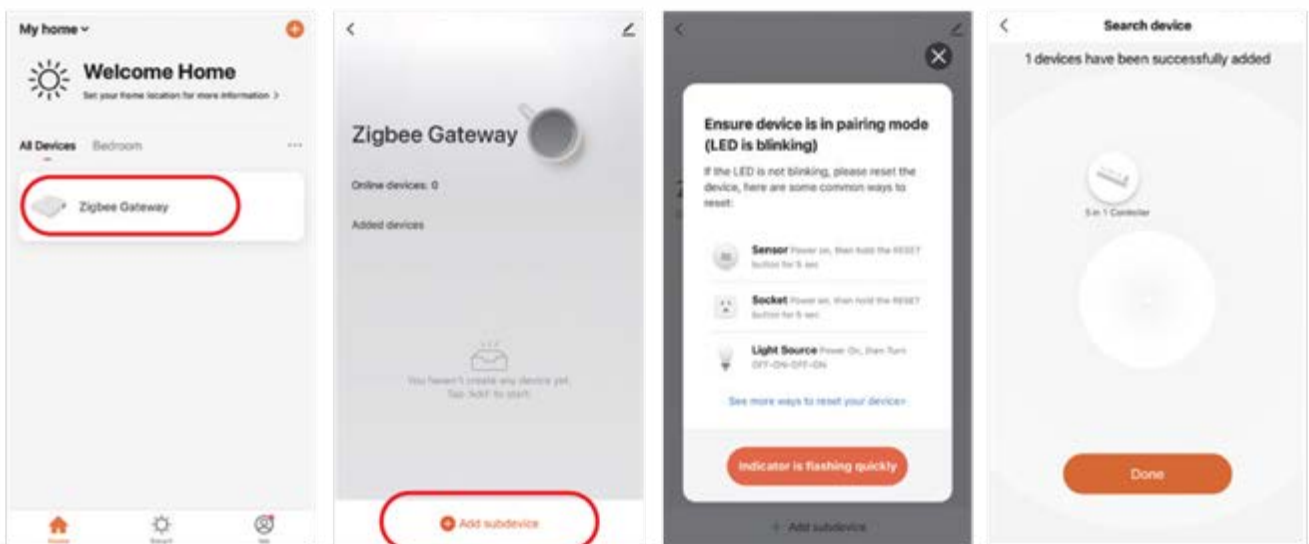

App turn on and off “Do Not Disturb” mode (default activated)


Click the light which need to be set up or group control --- click “More” --- click “Power-on behavior” --- turn on or off

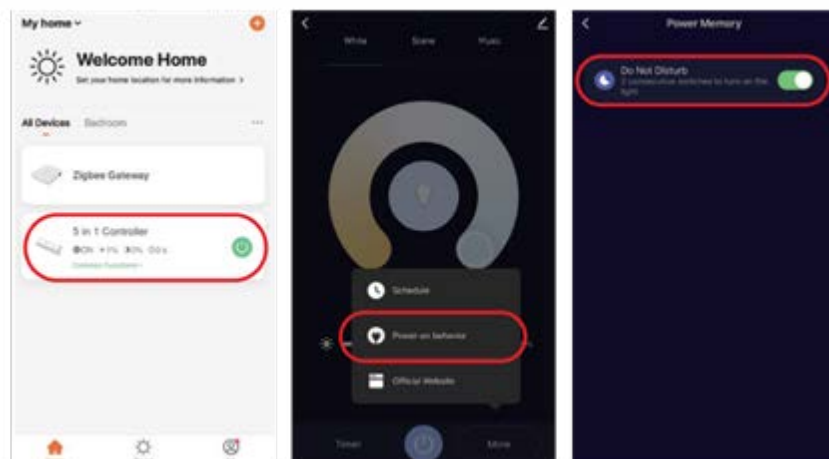

PHILIPS HUE CONTROL INSTRUCTION

Added "Philips Hue" into APP

1. Connect with power supply.
2. Pairing network (attention: factory default is pairing network)
Way one: Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.
Way two: Long press "SET" key until indicator light flashing.
3. Open "Philips Hue" App to click "SETTINGS" and click "Lights"
4. Click "+" on the top of right corner
5. Click "Search"
6. Click "Start configuration", Follow the app instruction to complete configuration

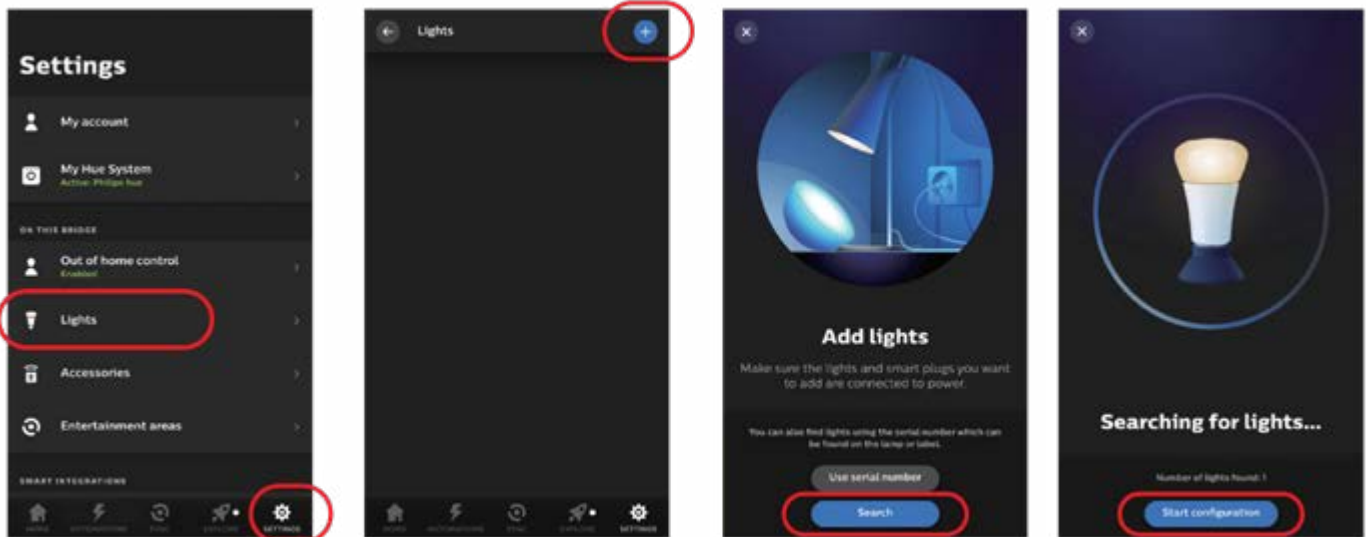

ALEXA VOICE CONTROL INSTRUCTION


1. Alexa control (Audio support Zigbee 3.0 protocol)

You can connect directly if your Amazon ECHO already is built-in zigbee 3.0 protocol, following model with zigbee 3.0 protocol:

Amazon ECHO Plus (2nd Gen), ECHO (4th Gen), ECHO Studio, ECHO Show (2. Gen)

1. Connect with power supply
2. Pairing network (attention: factory default is pairing network)
Way one: Turn off and turn on light 3 times or over 3 times continuously, the light is in breathing status.
Way two: Long press " SET " key until indicator light flashing.
3. Say to Amazon ECHO "Alexa, Discover devices" Wait for a while to discover device, Voice control is activated.

"Alexa, Discover Devices"

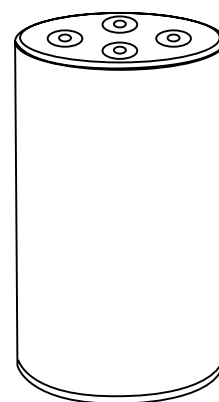


2. Alexa control (Audio don't support Zigbee 3.0 protocol)

Please add device into Miboxer Zigbee 3.0 gateway if your Alexa don't support zigbee 3.0 protocol (check details in page 8), then start following steps

1. Open Alexa App
2. Click "More" on the bottom of right corner
3. Click "Skills & Games"
4. Click "Q" on the top of right corner
5. Type into "Smart life" and search
6. Click "Smart Life" skill, follow instruction to finish configuration and start voice control


1-2-3

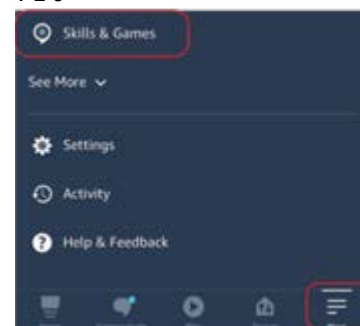

4-5



6

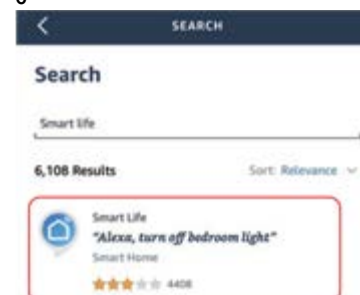


GOOGLE HOME VOICE CONTROL INSTRUCTION


Please add device into MiBoxer Zigbee 3.0 gateway (check details in page 8) and start following steps

1. Open Google Home App
2. Click “+” on the top of left corner
3. Click “Set up device”
4. Click “Works with Google”
5. Click “Q ” on the top of right corner
6. Type into “Smart life” and search
7. Click “Smart Life” skill, follow instruction to finish configuration and start voice control


1-2

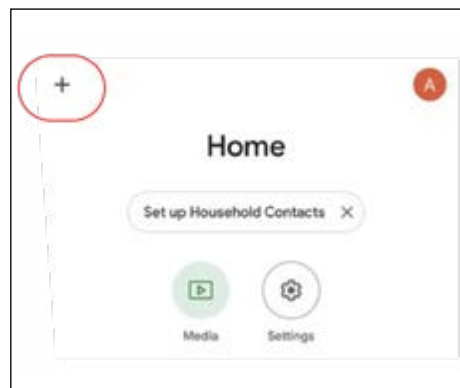


3

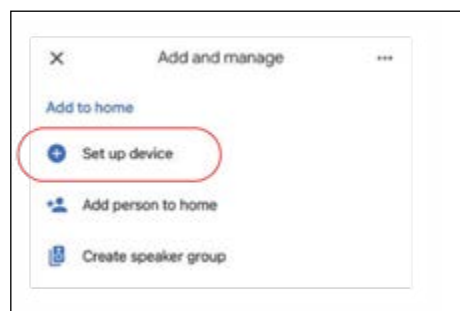


4

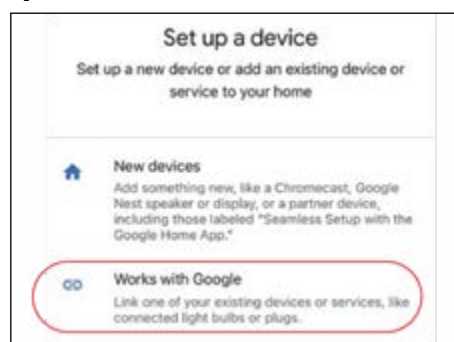

5-6-7

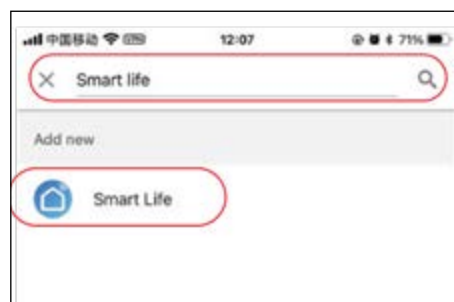


DMX512 LED TRANSMITTER CONTROL (PURCHASED SEPARATELY)

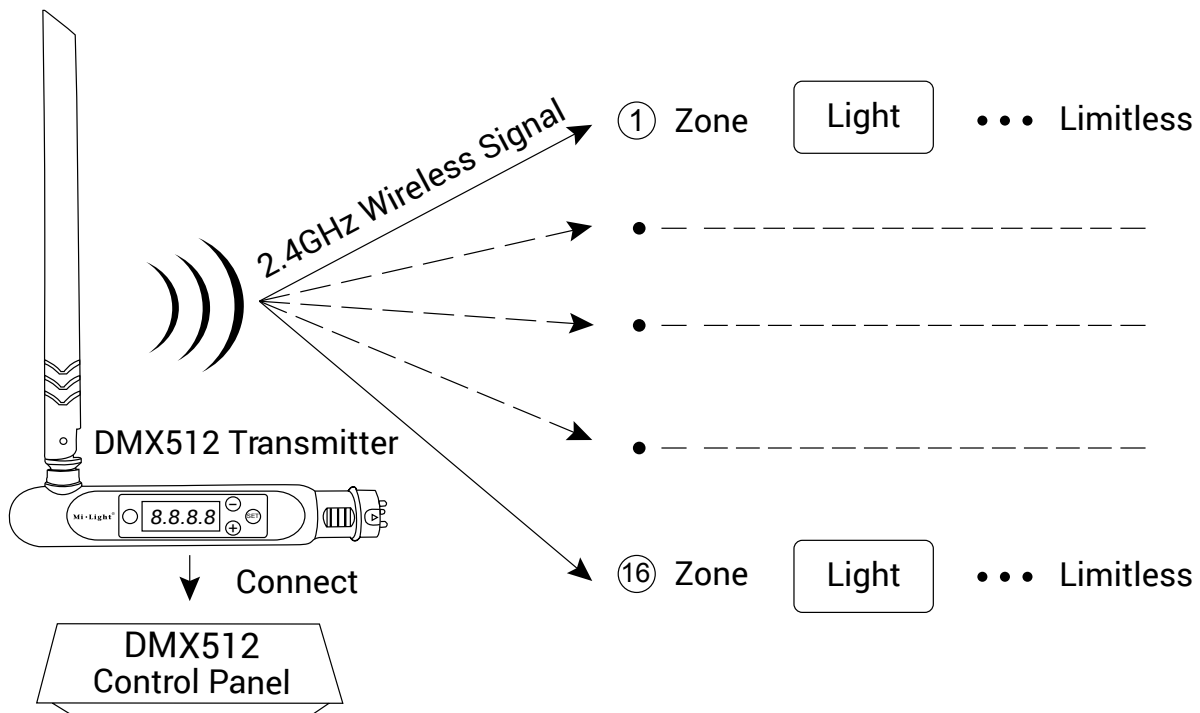

DMX512 LED Transmitter Link/Unlink

- Follow instruction of DMX512 transmitter (FUTD01), Choose the zone for the light by pressing “+” or “-” (e.g. “CH12” means zone 12)

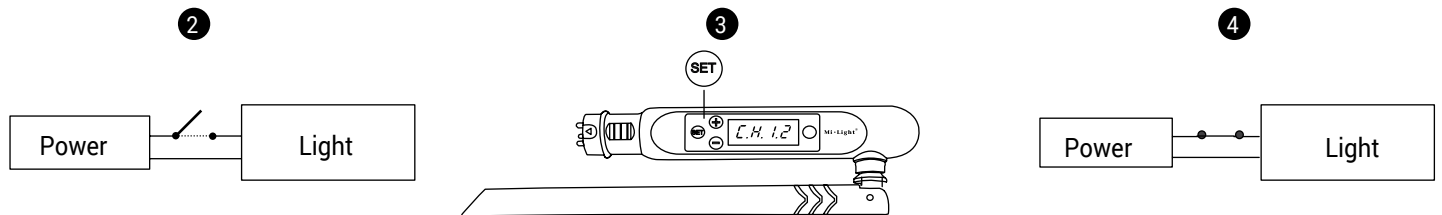

Link

Power off and power on again after 10 seconds.

When the light is on, short press “SET” 3 times within 3 seconds

The light blink slowly 3 times, means the linking is done successfully.

Unlink

Power off and power on again after 10 seconds.

When the light is on, short press “SET” 5 times within 3 seconds

The light blink quickly 10 times, means the unlinking is done successfully



If the link or unlink failed, please follow the above steps again.

ATTENTION

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don't disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.



Scan QR code to watch Zigbee series video instruction Or enter into following link directly.

<https://miboxer.com/light/video/zigbee.html>



MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121