


MIRRORSTONE
LIGHTING

Easilight Mini Remote (2.4GHz)

MS-EZI-K2S

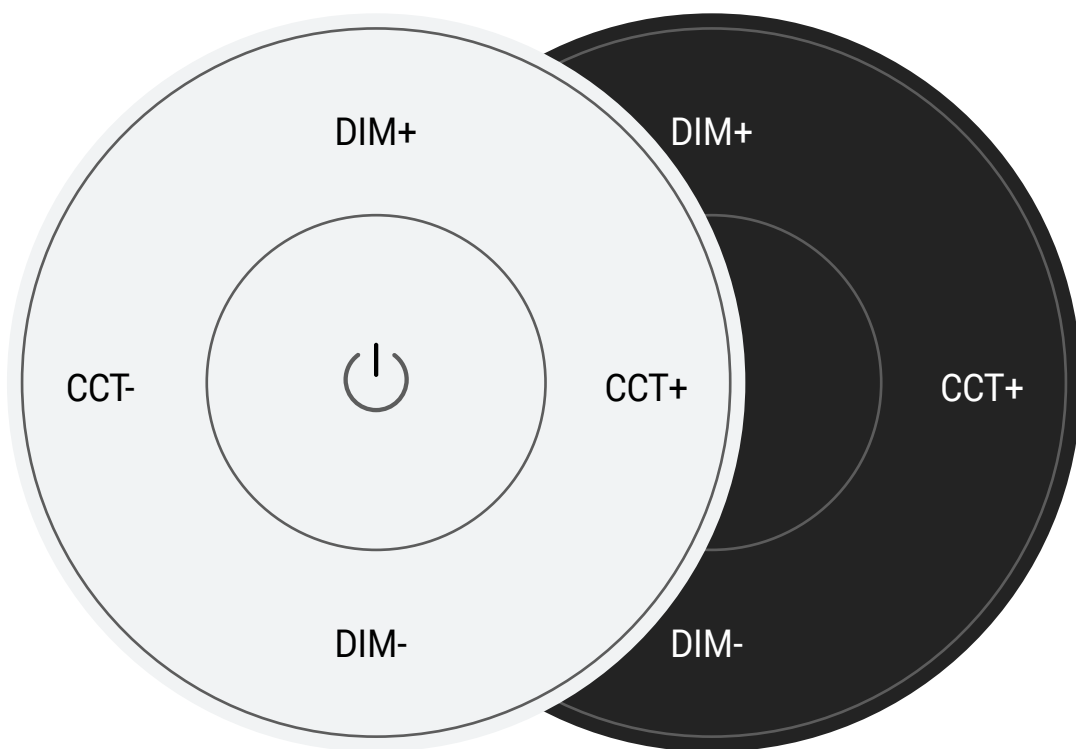

UK
CA **CE** **RoHS**

CONTENTS

1. Product Feature	3
2. Product Parameter	3
3. Size	3
4. Button Description	4
5. Install Battery	5
6. Linking/Unlinking	5
7. Installation Notes	6
8. Attention	7

PRODUCT FEATURE

Mini remote adopts 2.4GHz frequency with low power consumption long distance transmitting, strong anti interference, and fast communication rate. Simply press the button on the remote control, You can enjoy the comfortable lighting effect. Mini easy for using, Magnetic installation is very firm. Can control designated Mi-Light /MiBoxer 2.4G lamps, The color temperature and brightness of the light can be adjusted. Now start, let the light do whatever you want.


PRODUCT PARAMETER

Product Name:	Easilight Mini Remote (2.4GHz)
Model No.:	K2 / K2-B / K2S / K2S-B
Working voltage:	3V (CR2032 battery)
Standby Power Consumption:	<6 μ A
Transmission Power:	6dBm
Control Distance:	30M


RF:	2.4GHz
Working Temperature:	-10~40°C

SIZE


K2/ K2-B

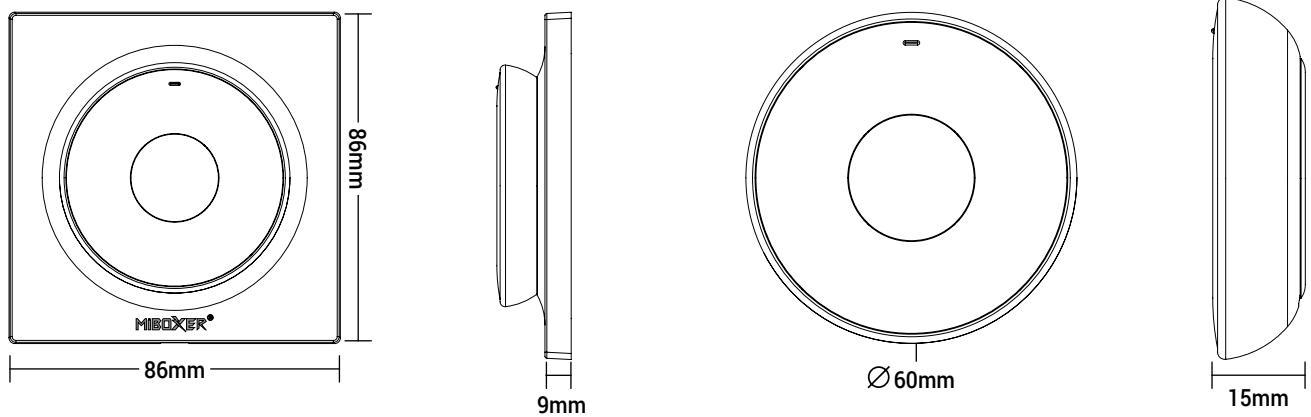

K2S/ K2S-B

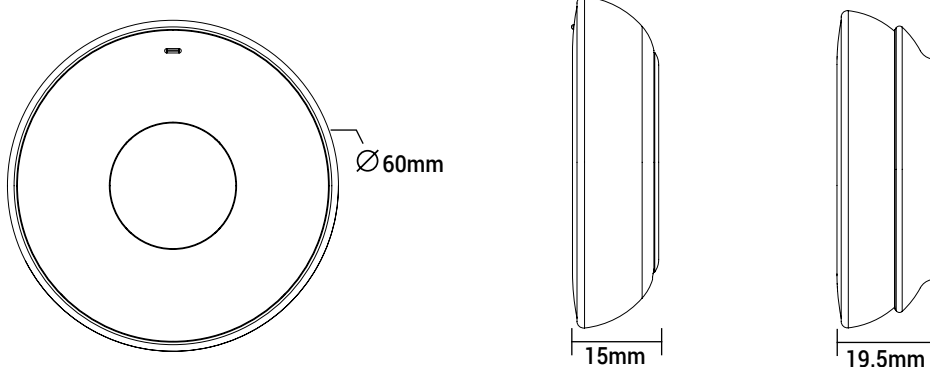


BUTTON DESCRIPTION

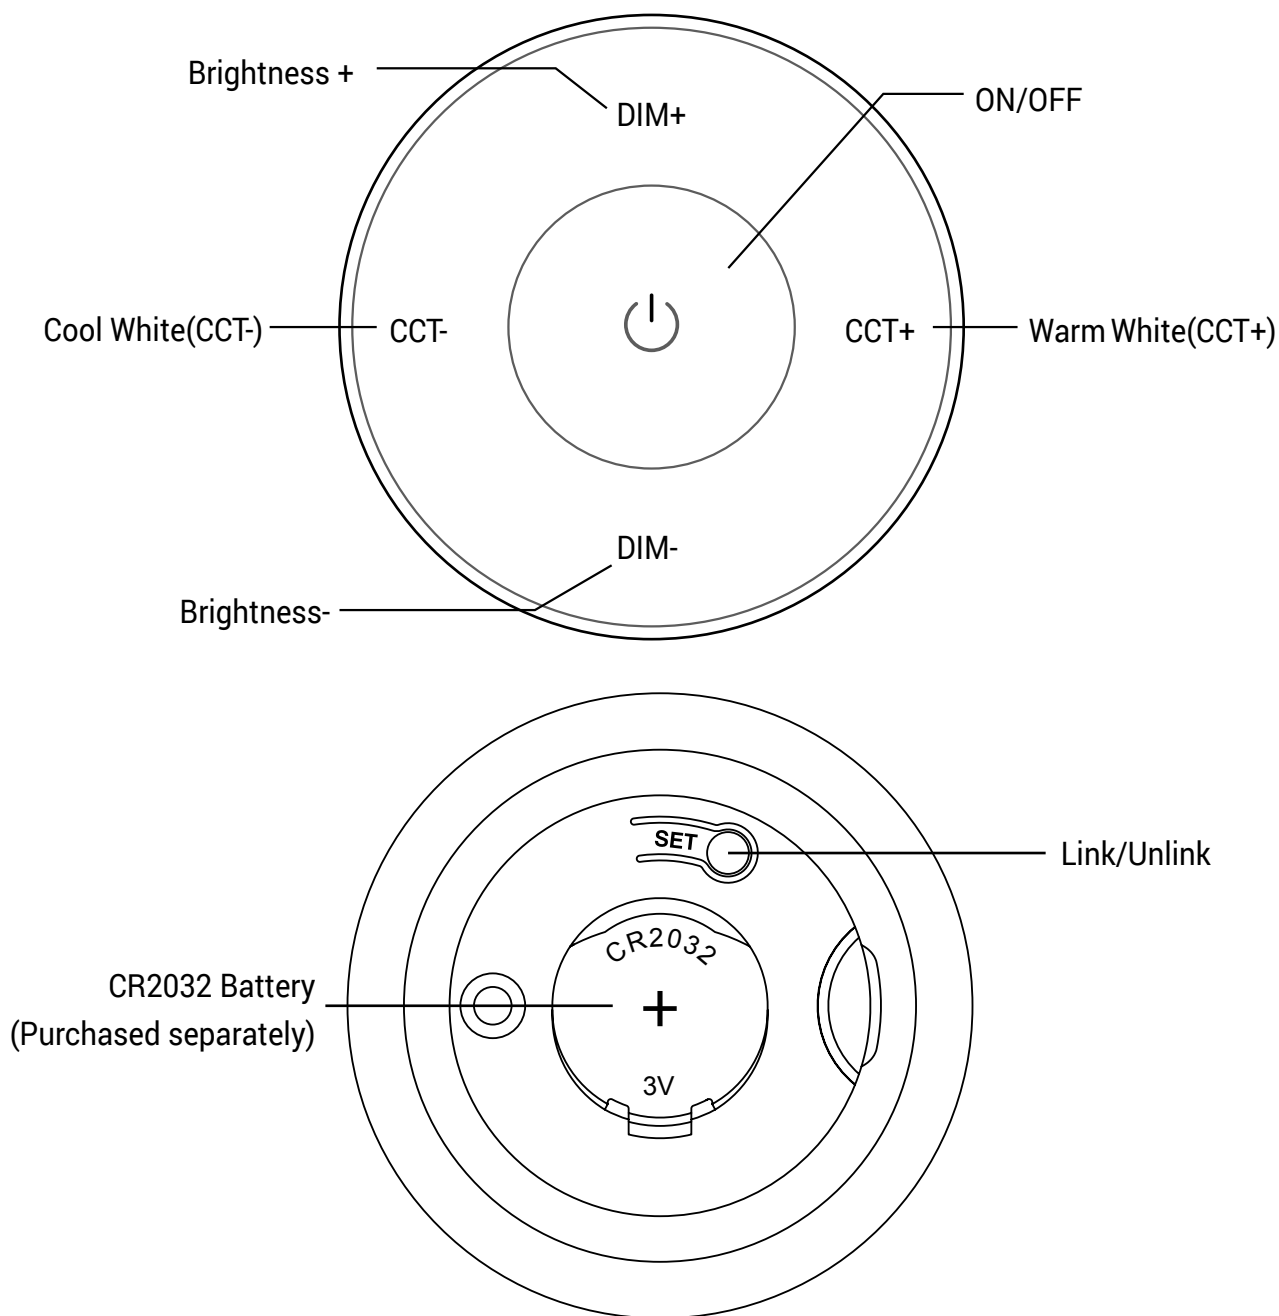


INSTALL BATTERY

1. Open battery cover

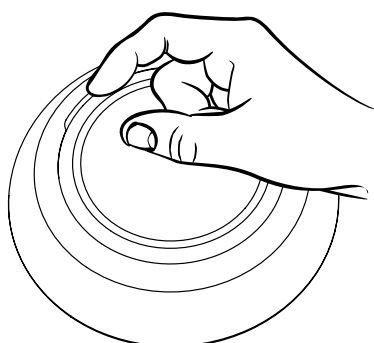


2. Install the battery as photo (CR2032 Purchased separately)

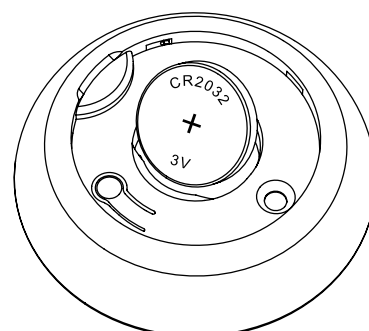


LINKING/UNLINKING

Note: Remote need link with lights before control light.


Linking Instruction



- 1 Turn off light after 10 seconds turn off



- 2 Short press "SET" 3 seconds turn of within 3 second when the light on




- 3 Light flashing 3 times slowly means it is successfully




Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)


Unlinking Instruction



- 1 Turn off light after 10 seconds turn on



- 2 Short press "SET" 5 times within 3 second when the light on







- 3 Light flashing 10 times slowly means it is successfully



Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)


INSTALLATION NOTES

K2 / K2-B: Method 1

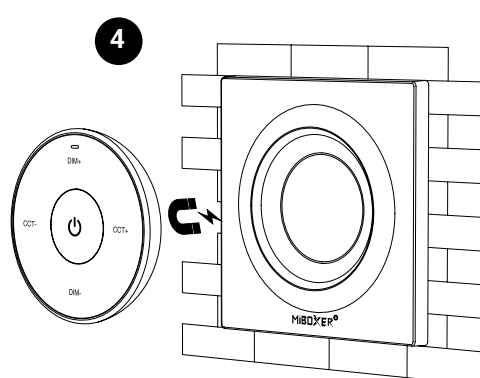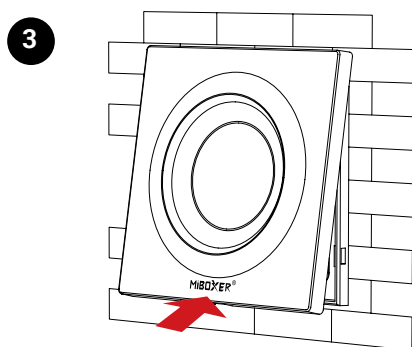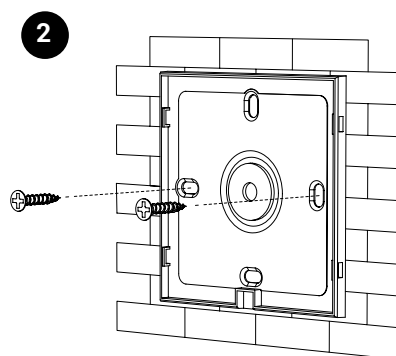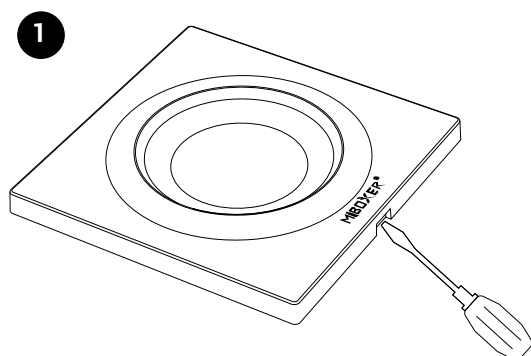


Method 2

- 1 Take off the double-sided tape on the back of the base

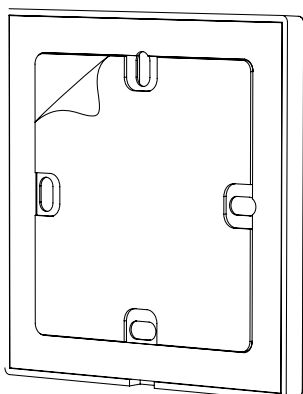


- 2 Stick the base well, and the remote control is magnetically attracted to the base

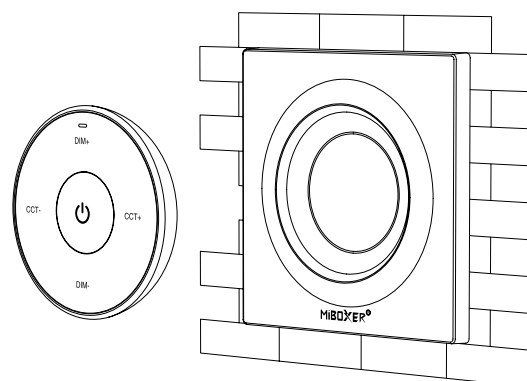


K2S / K2S-B:

- 1 Take off the double-sided tape on the back of the base

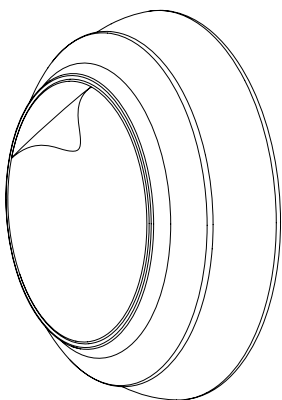

- 2 Stick the base well, and the remote control is magnetically attracted to the base

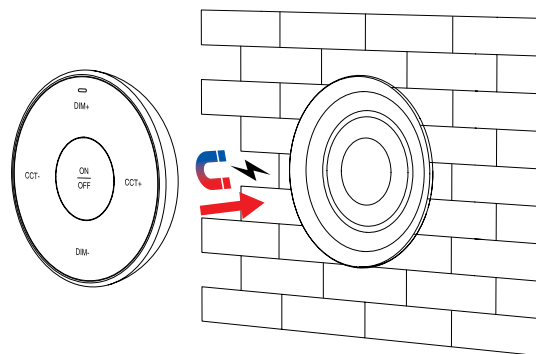

ATTENTION:

1. This remote only control specified Mi-Light / Miboxer products; details please check manual.
2. This remote control is a precision electronic product, please do not use it in a humid or high temperature environment for a long time. When not in use for a long time, please take out the battery and store it in a dry, static-free environment.
3. Do not use the remote control in a large area of metal or in an environment with strong electromagnetic waves nearby, otherwise the control distance will be seriously affected.

MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121