

MIRRORSTONE
LIGHTING

Easilight 4 Gang Wireless Dimming Panel

MS-EZI-K4



UK
CA **CE** **RoHS**

CONTENTS

1. Features	3
2. Product Parameters	3
3. Product Size	3
4. Dimming Control	4
5. Installation	4
6. Linking/Unlinking Code Instructions	5
7. Attention	6

FEATURES

- CR2032 battery powered
- No wiring, easy to realize wireless dimming of PUSH switch
- Compatible with MiBoxer / Mi-Light 2.4G series lamps
- Adopt 2.4G RF wireless transmission technology, control distance 30m
- Supports 4 sets of independent control, unlimited number of lamps
- Dimming range 0.1%-100%




PRODUCT PARAMETERS

Product Name:	Easilight 2 Gang Push Wireless Dimming Panel (2.4GHz)
Model No:	K4
Input Voltage:	3V (CR2032*1PCS)
Transmitting Power:	6dBm
RF:	2.4GHz
Control Distance:	30m
IP Rating:	IP20
Working Temperature:	-10~40°C
Standby Power Consumption:	<6μA


EMC Standard (EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.1.1
Safety Standard (LVD):	EN 61347-1: 2015+A1:2018 EN 61347-2-11: 2001+A1:2019
Radio Equipment (RED):	ETSI EN 300 440 V2.2.1
Certification:	CE, EMC, LVD, RED

PRODUCT SIZE

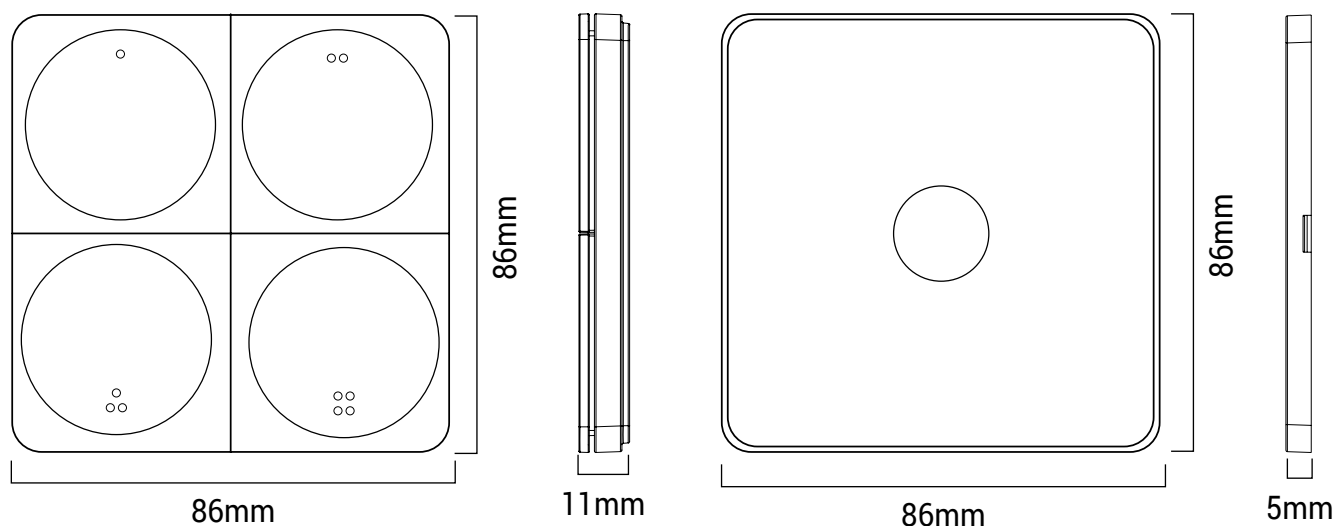


DIMMING CONTROL

- Short press to turn on/off the light, long press to adjust the light brightness.
- Supports 4 sets of independent control, unlimited number of lamps

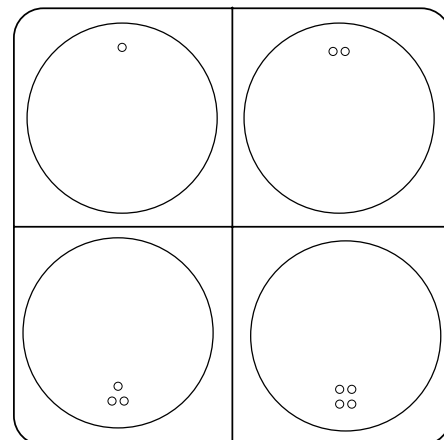


ON/ OFF/ Brightness


INSTALLATION

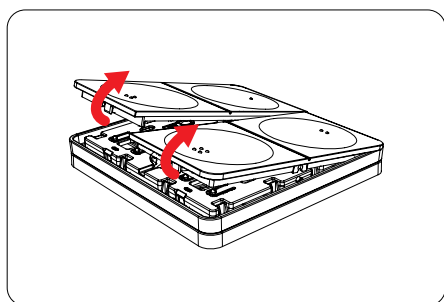


1. Remove up cover

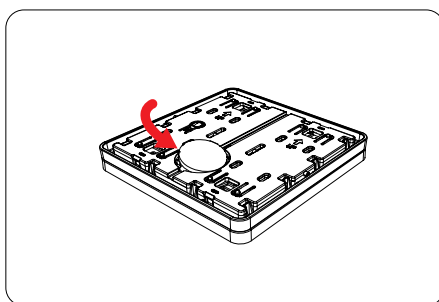


2. Put CR2032 battery into it

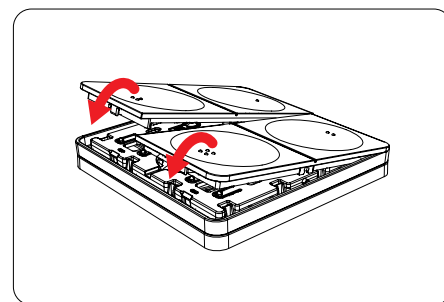


3. Return up cover

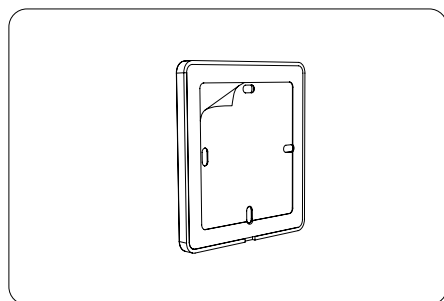

4. Tear out the back tape

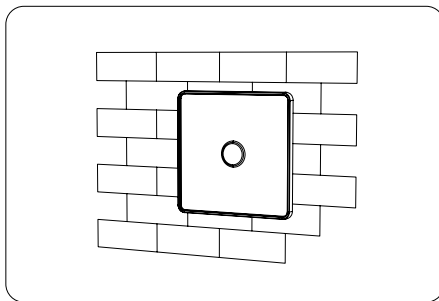

5. Stick the holder on the position where you want

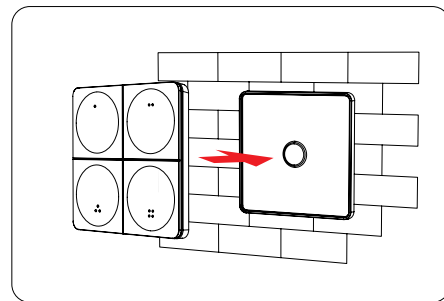


6. Put the rotating switch on the front of holder

LINKING CODE INSTRUCTIONS


Linking Code Instructions

1




Turn off light 10 seconds and turn on again.

2

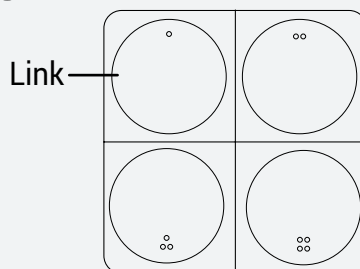

Short press "Zone" button 6 times within 3 seconds.

3




Link is done once light flashes 3 times slowly.



Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if dimming panel already finished linking)


Unlinking Code Instructions

1




Turn off light 10 seconds and turn on again.

2

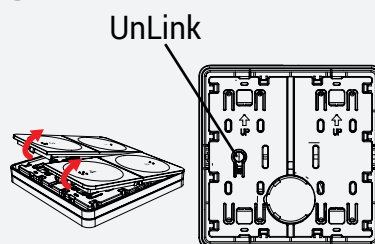

Short press "Unlink" button 5 times within 3 seconds.

3



Link is done once light flashes 10 times quickly.



Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the dimming panel never be linked)

ATTENTION

1. Please do not use it in a humid or high temperature environment for a long time. When not in use for a long time, please remove the battery and store it in a dry, static-free environment.
2. Do not use it in an environment with a large area of metal or near strong electromagnetic waves, otherwise the control distance will be seriously affected.



MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121