

MIRRORSTONE

LIGHTING

Easilight 2.4GHz Wireless Dimming (3-Zone)

MS-EZI-PUSH1-3



CONTENTS

1. Features	3
2. Product Parameters	3
3. Product Size	3
4. Connection Diagram	4
5. Installation Diagram	4
6. Linking Code Instructions	5
7. Dimming Control	6
8. Notice	6

FEATURES


- AC100-240V powered
- No wiring, easy to realize wireless dimming of PUSH switch
- Compatible with MiBoxer / Mi-Light 2.4G series lamps
- Adopt 2.4G RF wireless transmission technology, control distance 30 meters
- Supports 3 sets of independent control, unlimited number of lamps
- Supports 4096 levels of smooth dimming, with a minimum brightness of 0.1%
- Dimming range 0.1%-100%




PRODUCT PARAMETERS

Product Name:	Easilight 2.4GHz Wireless Dimming (3-Zone)	Dimming Grayscale:	4096 Levels
Model No:	PUSH1-3	Dimming Range:	0.1%-100%
Input Voltage:	AC100-240V 50/60Hz	EMC Standard (EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.1.1
Transmitting Power:	6dBm	Safety Standard (LVD):	EN 61347-1: 2015+A1: 2018 EN 61347-2-11: 2001+A1:2019
RF:	2.4GHz	Radio Equipment (RED):	ETSI EN 300 440 V2.2.1
Control Distance:	30m	Certification:	CE, EMC, LVD, RED
IP Rating:	IP20		
Working Temperature:	-10~40°C		
Standby Power Consumption:	0.15W		

PRODUCT SIZE


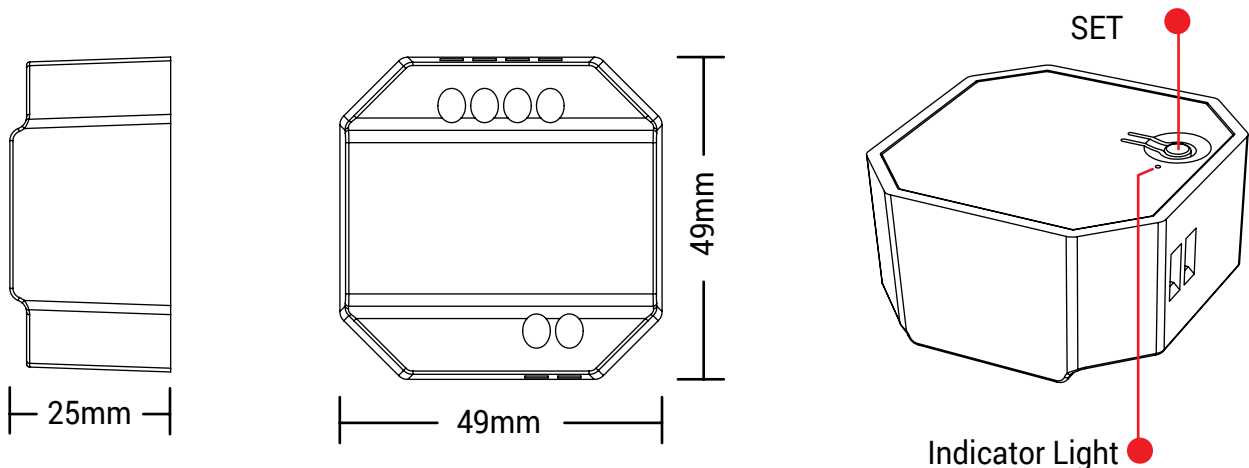


CONNECTION DIAGRAM

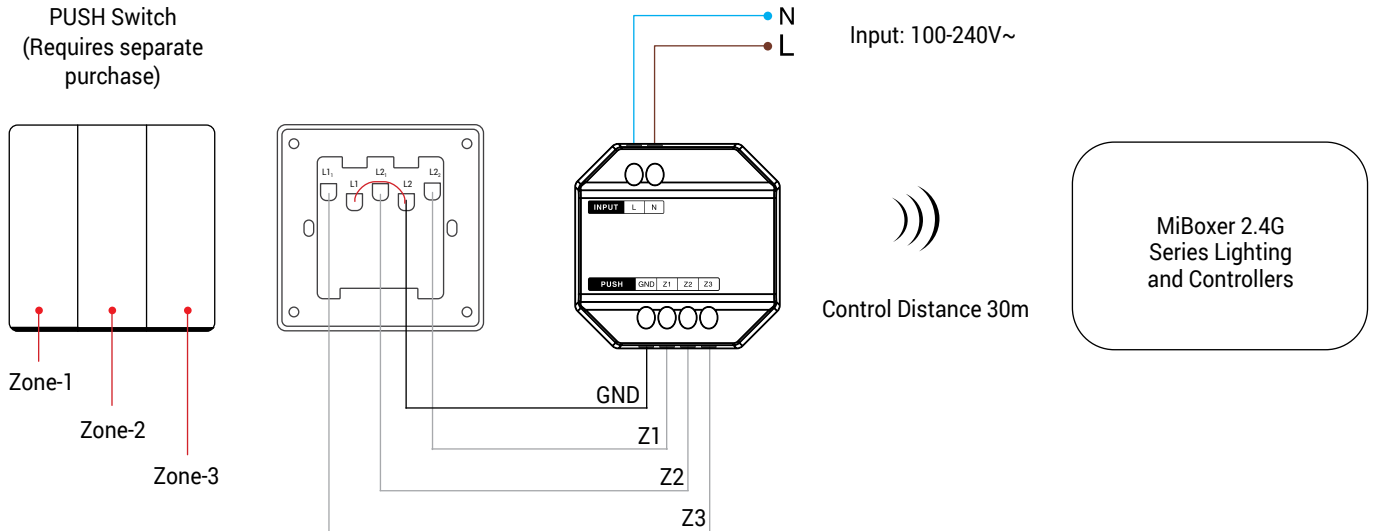

INSTALLATION DIAGRAM

Support following standing junction box

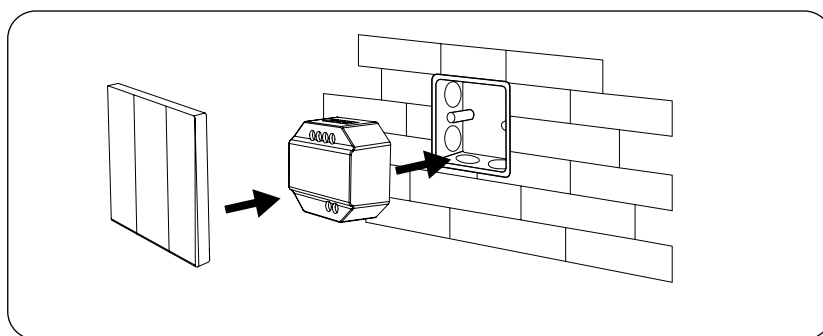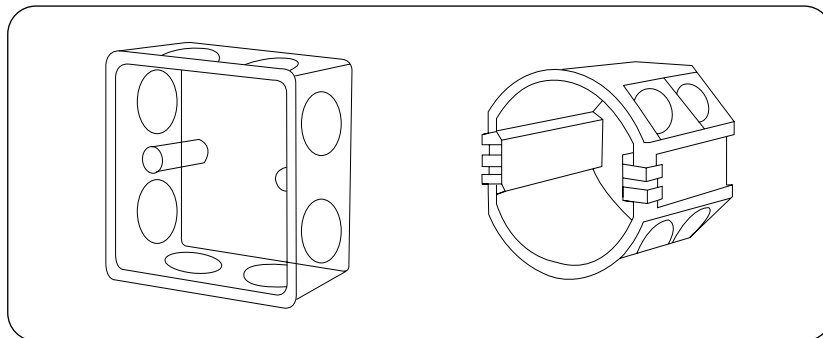


PUSH switch

The depth of junction box is over 50mm

LINKING CODE INSTRUCTIONS


Linking Code Instructions

1



Power of, then power on again after 10 seconds

2



Short press 6 times

Short press the "PUSH" 6 times within 3 seconds

3




The lamp flashes slowly 3 times, indicating successful linking



If the lamp does not flash slowly, the code binding failed, please re-perform the above steps. (Note: Already coded lamps cannot be coded again).


Unlinking Code Instructions

1




Power of, then power on again after 10 seconds

2



Short press the "SET" 5 times within 3 seconds

3




The lamp flashes quickly 10 times, indicating successful unlinking



If the light does not flash quickly, the code clearing failed, please perform the above steps again. (Note: Already coded lamps cannot be coded again).

DIMMING CONTROL

- Supports 3 sets of independent control, unlimited number of lamps
- Short press to turn on/off the light, long press to adjust the light brightness.

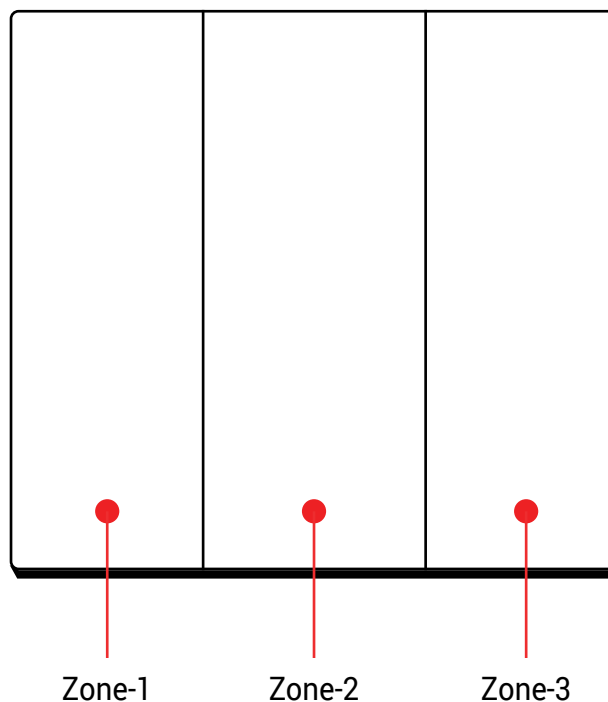

Notice

1. Please do not use it in a humid or high temperature environment for a long time. When not in use for a long time, please remove the battery and store it in a dry, static-free environment.
2. Do not use it in an environment with a large area of metal or near strong electromagnetic waves, otherwise the control distance will be seriously affected.

MIRRORSTONE

LIGHTING

sales@mirrorstone.co.uk

www.mirrorstonelighting.co.uk

86 Scudamore Road Leicester, LE3 1UQ

+44 (0) 116 321 4121